

AD-A239 672

Technical Report 921

An Adaptive Coherent Optical Receiver Array



L.B. Mercer

18 June 1991

Lincoln Laboratory

MASSACHUSETTS INSTITUTE OF TECHNOLOGY

LEXINGTON, MASSACHUSETTS

13

* 1



Prepared for the Department of the Air Force under Contract F19628-90-C-0002.

Approved for public release; distribution is unlimited.

91-08575

This report is based on studies performed at Lincoln Laboratory, a center for research operated by Massachusetts Institute of Technology. The work was sponsored by the Department of the Air Force under Contract F19628-90-C-0002.

This report may be reproduced to satisfy needs of U.S. Government agencies.

The ESD Public Affairs Office has reviewed this report, and it is releasable to the National Technical Information Service, where it will be available to the general public, including foreign nationals.

This technical report has been reviewed and is approved for publication.

FOR THE COMMANDER

Hugh L. Southall, Lt. Col., USAF

Hugh L. Southall

Chief, ESD Lincoln Laboratory Project Office

Non-Lincoln Recipients

PLEASE DO NOT RETURN

Permission is given to destroy this document when it is no longer needed.

MASSACHUSETTS INSTITUTE OF TECHNOLOGY LINCOLN LABORATORY

AN ADAPTIVE COHERENT OPTICAL RECEIVER ARRAY

L.B. MERCER
Group 67

TECHNICAL REPORT 921

18 JUNE 1991

Approved for public release; distribution is unlimited.

LEXINGTON MASSACHUSETTS

ABSTRACT

A linear, four-element, adaptive heterodyne optical receiver array employing semiconductor lasers is described. The array adaptively adjusts the phase of each subaperture IF signal to correct for wavefront tilt and distortion and nonuniform optical and RF path delays across the array by phase locking each channel to a reference channel.



Accessi	on For				
NTIS G	RA&I	1			
DTIC TA	KB.				
Unammo).	insed				
Justif!	cation_				
Ru					
By					
Distribution/					
Availability Codes					
Avera and/or Spectal					
P-1					

ACKNOWLEDGMENTS

I would like to thank E.A. Swanson and R.S. Bondurant for the initial motivation and considerable assistance they provided for this project.

TABLE OF CONTENTS

	Abstract	ii
	Acknowledgments	iii
	List of Illustrations	v
1.	INTRODUCTION	1
2.	SYSTEM DESCRIPTION	2
3.	RESULTS	5
4.	CONCLUSIONS	8
REI	FERENCES	9

LIST OF ILLUSTRATIONS

Figure No.		Page
1	Coherent optical receiver array.	2
2	Signal processing for adaptive array.	3
3	Full and subaperture SNR versus received signal angle of arrival.	5
4	Adapted array signal levels versus received signal angle of arrival.	6
5	Adapted array signal level and full aperture signal level versus received signal angle of arrival.	7

1. INTRODUCTION

Coherent optical radar and communications systems commonly require antenna gains of 120 dB and higher. The expense of building these large diameter telescopes with high quality optics can be prohibitive. RF systems designers have long recognized that it is often advantageous to realize a high gain antenna with an array of antennas. An array antenna offers the opportunity to correct for atmospheric distortion and the possibility of automatic tracking, point-ahead, adaptive nulling, and multiple beams. Another advantage of an array is that an array of N small telescopes will have volume $1\sqrt{N}$ the volume of a single large telescope with the same F-number and total aperture size. The array may be constructed with separate telescopes or it may be formed by placing a detector array in the pupil plane of a larger telescope [1]. Previously such an array was constructed using a Bragg cell as a phase shifter for each channel [2]. Another technique, applicable to receiver arrays, uses electronic phase shifters to adjust the phase of IF signals from each subaperture [3]. An array such as this may prove most useful in nonsymmetric links where the gain of the transmitter antenna can be much less than the gain of the receiver antenna. The system might be a satellite to the ground communications link with a high capacity downlink and a low capacity uplink, or it might be the receiver for a laser radar with a broad illumination by the transmitter and a high resolution requirement for the receiver.

A coherent optical receiver array has been built that adaptively adjusts the phase of the signal from each subaperture using electronic phase-locked loops (PLL). The array effectively provides the signal quality of a receiver with an aperture area equal to the sum of the individual subaperture areas. At the same time the array reduces the tracking and wavefront requirements to those of the smaller subapertures by correcting for wavefront tilt and distortion across the array.

2. SYSTEM DESCRIPTION

To demonstrate the concept of electronic phase adaption, a four-element linear array of coherent optical receivers has been assembled as shown in Figure 1. The individual aperture size is 5.1 mm square providing a full aperture 20.3 mm wide. The combined local oscillator (LO) and signal fields entering each lens are focused onto separate positive-intrinsic-negative semiconductor (PIN) diodes and the resulting first IF signals are amplified before further processing. Another lens with a 5.1×20.3 -mm aperture and a PIN detector are located on the other side of the beam splitter to allow simultaneous comparison of the full aperture with the array. This lens has a 5.1×20.3 -mm aperture to match the array. The LO and signal are obtained from separate Hitachi 30-mW HL8314E laser diodes operating at 860 nm. The combined IF linewidth for the two lasers is about 30 MHz.

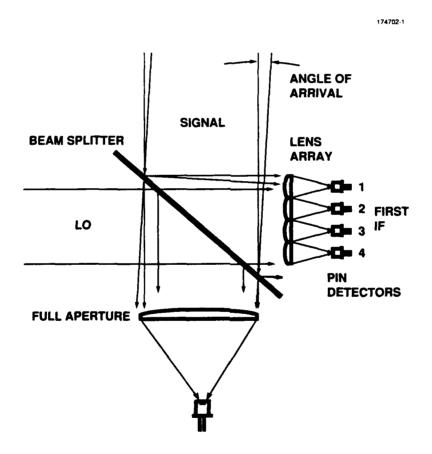


Figure 1. Coherent optical receiver array.

The first IF signals could have different phases due to any combination of signal or LO wavefront tilt or distortion and different optical and RF path delays. To allow coherent summing, the phase of each signal is adjusted by using separate voltage-controlled oscillators (VCOs) to phase lock each second IF signal to the reference channel, subaperture 1 [3]. This subaperture was chosen over one of the central subapertures to stress the system by providing the greatest difference in phase between channel 4 and the reference, as shown in Figure 2. The phase-error signal, which is obtained by correlating the second IF signal with the reference channel, is filtered and then coupled to the VCO to match the second IF phase to the reference phase. To maintain a constant response from the mixer that is used as a phase detector, each input is amplified and hard limited. The loop filter consists of a single integrator that provides a type II PLL. The PLLs each have a natural frequency of 10 kHz and a damping factor of about 0.7.

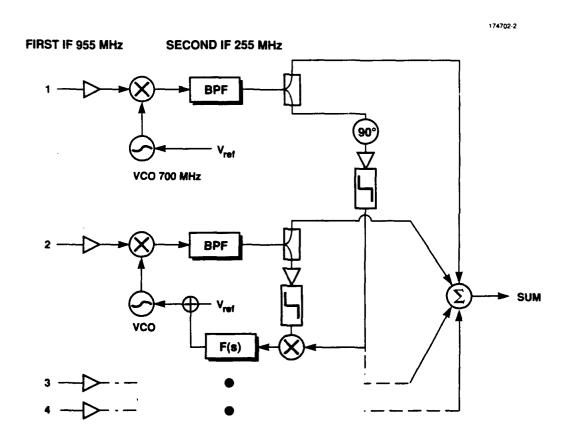


Figure 2. Signal processing for adaptive array.

By locking each channel to a reference channel instead of locking to a reference oscillator, the array is able to adapt even with large linewidth LOs and signal lasers and the array does not require a pilot signal even when the signal laser is modulated. Locking to a reference oscillator would require the use of

a pilot signal with a linewidth much smaller than the tracking bandwidth of the PLLs and thus is not practical when using wide linewidth sources. Locking to a reference channel or locking to the sum signal reduces the bandwidth requirement to the tracking of changes in the phase that are due to wavefront tilt or distortion, given that the LO for each receiver is derived from the same source. Locking to the sum signal promises better system operation because of the improved signal-to-noise ratio (SNR) of the sum signal; however, time delays must be considered carefully to avoid offsets in the phase-error signal due to correlation of the channel signal with the component of the sum signal that is from the same channel. Locking to the reference channel was chosen for our initial demonstration because it was easy to implement.

3. RESULTS

The relative SNR of a single subaperture, aperture 1, and the full aperture are shown in Figure 3 along with the $\sin^2(\pi\Theta d/\lambda)/(\pi\Theta d/\lambda)^2$ response predicted for each of these apertures. (The full aperture and aperture 1 responses are normalized to 0 and -6 dB respectively to show the expected increase in SNR.) Under ideal conditions the full aperture has a 6 dB advantage over the smaller subapertures; however, the subaperture begins to win even for a small misalignment. The motivation for the array design is to obtain the SNR performance of the full aperture over the wider subaperture field-of-view and the reduced wavefront quality requirements of the subapertures. The measured subaperture response is very close to the theory; however, the measured response for the full aperture is significantly broader than the theory predicts. This difference is probably due to distortion of the LO and signal field wavefronts and the fact that each of these optical beams actually had truncated Gaussian intensity profiles instead ϵ the uniform profiles assumed by the theory. It is useful to observe that the smaller apertures are much less sensitive to these conditions than the full aperture.

Assuming equal signal levels and equal independent noise levels in each channel of the array, the maximum SNR for the sum signal is obtained when each channel is in phase allowing the signals to add coherently. For four channels, the resulting signal level should be 12 dB higher and the resulting noise level

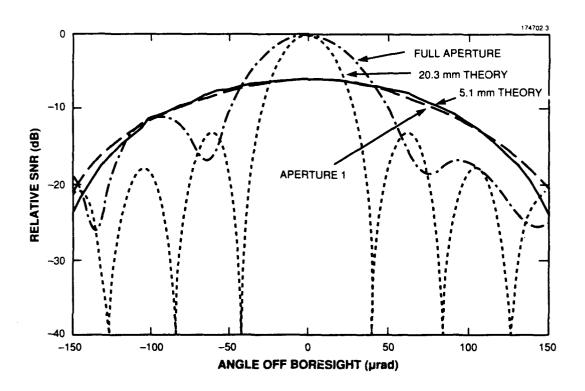


Figure 3. Full and subaperture SNR versus received signal anlge of arrival.

should be 6 dB higher. The performance of the array was evaluated by varying the angle of arrival of the signal beam and measuring the RF signal power from each aperture and from the sum of the signals. The results are shown in Figure 4. The curve labeled coherent sum is the square of the sum of the signal amplitudes and thus represents the best performance possible from the array signal processing. The adapted sum is within 0.6 dB of this level for all angles of arrival of the input signal between the half power points. The aperture-to-aperture variations seen in these results are probably due to distortions in the signal and LO wavefronts and nonuniform intensity profiles. For comparison the array was also operated unadapted by shorting the integrator in the PLL filter. This caused each VCO to operate at a slightly different frequency and the subaperture signals to add incoherently. (The average sum signal power equals the sum of the subaperture signal powers.) The results for this unadapted mode were also very close to the expected levels.

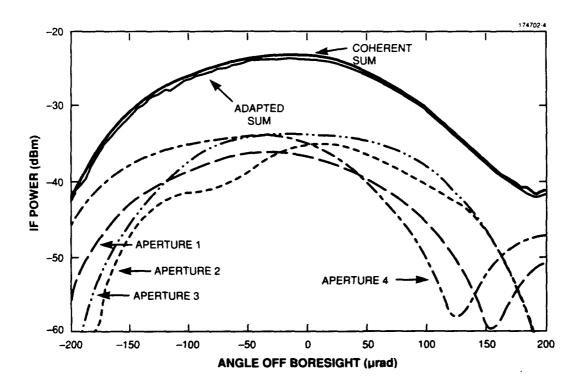


Figure 4. Adapted array signal levels versus received signal angle of arrival.

To illustrate the advantage of the array over an aperture with the same area, the adapted sum and full aperture signals were measured simultaneously as the angle of arrival of the signal beam was varied. The results in Figure 5 show that the array suffers much less from alignment errors than the equivalent single aperture. (The peak levels are arbitrarily normalized.)

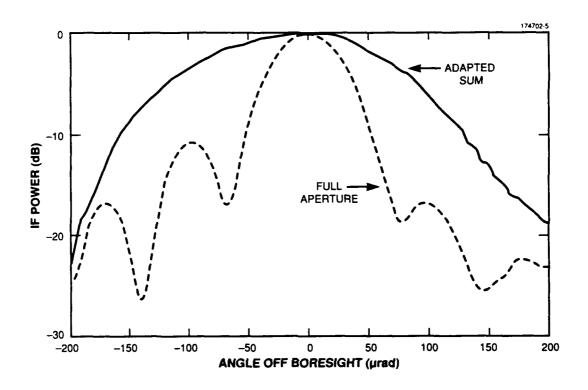


Figure 5. Adapted array signal level and full aperture signal level versus received signal angle of arrival.

4. CONCLUSIONS

An adaptive coherent receiver array has been built using PLLs to match the phases of the subaperture signals to a reference receiver consisting of one of the subapertures. The array has been shown to provide within 0.6 dB of the power expected from perfect coherent summing of the subaperture signals. To our knowledge, this is the first time a phased optical array has been constructed using electronic phase adjustment. The successful demonstration of this array suggests the opportunity for development of coherent optical arrays patterned after any of the numerous RF array configurations.

REFERENCES

- 1. E.S. Swanson, G.M. Carter, D.J. Bernays, and D.M. Hodsdon, "Optical spatial tracking using coherent detection in the pupil plane," *Appl. Op.* 28, (18), pp. 3918-3928 (1989).
- 2. C.L. Hayes, R.A. Brandewie, W.C. Davis, and G.E. Mevers, "Experimental test of an infrared phase conjugation adaptive array," J. Opt. Soc. Am. 67, (3), pp. 269-277 (1977).
- 3. J.H. Schrader, "A phase-lock receiver for the arraying of independently directed antennas," IEEE Trans. Antennas Propa., AP-12, (2) pp. 155-161 (1964).

REPORT DOCUMENTATION PAGE

Form Approved OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response including the time for reviewing instructions searching existing data sources gathering and maintaining the data needed and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information including suggestions for reducing this burden to Washington Headquarters Sendes. Directorate for information Operators and Reports, 1215 Jefferson Davis Highway, Surfe 1204. Artington, VA 22202.4302, and to the Office of Management and Budget. Paperwork Reduction Project (0704-0188). Washington, DC 20503.

AGENCY USE ONLY (Leave blank)	2. REPORT DATE 18 Jun e 1991	3. REPORT TYPE AND DATES COVERED Technical Report					
4. TITLE AND SUBTITLE	·	^	ING NUMBERS				
An Adaptive Coherent Optical Recei							
•							
6. AUTHOR(S)			F19628-90-0002				
		PR —	63789F, 33110F 270				
L.B. Mercer		- "					
		· · · · · · · · · · · · · · · · · · ·					
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)			ORMING ORGANIZATION RT NUMBER				
Lincoln Laboratory, MIT			III NOMBER				
P.O. Box 73		TR-921					
Lexington, MA 02173-9108							
9. SPONSORING/MONITORING AGEN	NSORING/MONITORING						
	,, . ,	,	NCY REPORT NUMBER				
Electronic Systems Division Hanscom AFB		ren m	R-91-062				
Bedford, MA 0-1731		ESD-11	1-71-WHZ				
11. SUPPLEMENTARY NOTES							
None							
							
12a. DISTRIBUTION/AVAILABILITY ST	ATEMENT	12b. DIS	12b. DISTRIBUTION CODE				
Approved for public release; distribution is unlimited							
13. ABSTRACT (Maximum 200 words)							
A limage form alcourage advention	a heterodyna antical manis	array employing semiconductor l	seers is described. The				
array adaptively adjusts the phase							
optical and RF path delays across t	-						
			T				
14. SUBJECT TERMS	15. NUMBER OF PAGES						
optical receivers wavefront correction optical communications adaptive arrays heterodyne optical receivers array antennas			16. PRICE CODE				
adaptive optics optical radar			ļ				
17. SECURITY CLASSIFICATION 18. SECURITY CLASSIFICATION 19. SECURITY CLASSIFICATION 20. LIMITATION OF REPORT OF THIS PAGE OF ABSTRACT ABSTRACT							
Unclassified Unclassified		MESTRACT					